
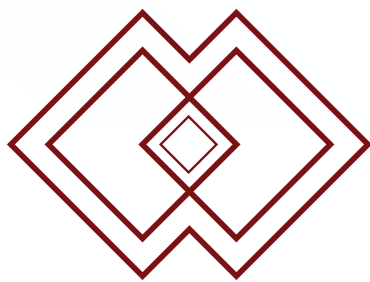


**ELECS  
M&M**

PRODUCT **CATALOGUE**

[www.elecsmm.com](http://www.elecsmm.com)

Ventilation Solution for Industrial Enclosures

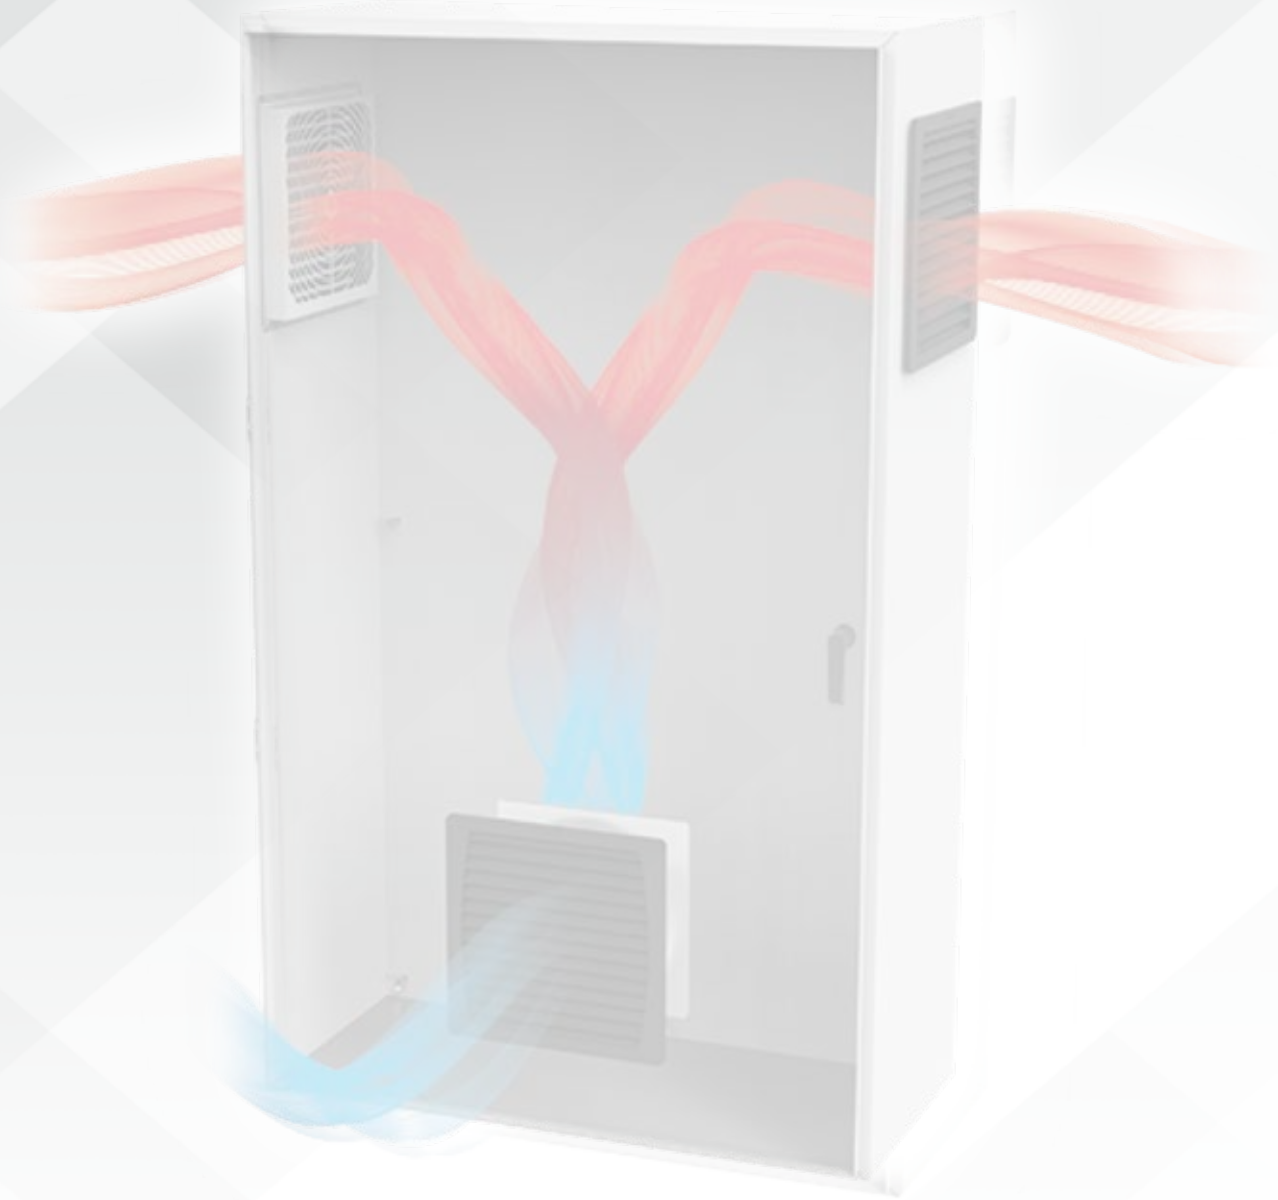

**ELECS  
M & M**

PIONEER IN THE FIELD OF  
ENCLOSURE THERMAL MANAGEMENT  
BY PROVIDING LATEST SYSTEMS & COMPONENTS

[www.elecsmm.com](http://www.elecsmm.com)

**Filter Fan AC**


Model	Dimension	Cut-out	Rated Voltage	Frequency	Power	Air Flow	Air Flow with Exhaust Filter
	(mm)	(mm)	(V AC)	(Hz)	(W)	(m³/h)	(m³/h)
E01.105.001	105 x 105 x 55	92 x 92	230	50/60	9	43	32
E01.105.002	105 x 105 x 42	92 x 92	110	50/60	14	36	27



Model	Dimension	Cut-out	Rated Voltage	Frequency	Power	Air Flow	Air Flow with Exhaust Filter
	(mm)	(mm)	(V AC)	(Hz)	(W)	(m³/h)	(m³/h)
E01.150.001	150 x 150 x 64	125 x 125	230	50/60	26	179	134
E01.150.002	150 x 150 x 64	125 x 125	110	50/60	26	163	122



Model	Dimension	Cut-out	Rated Voltage	Frequency	Power	Air Flow	Air Flow with Exhaust Filter
	(mm)	(mm)	(V AC)	(Hz)	(W)	(m³/h)	(m³/h)
E01.250.001	250 x 250 x 120	225 x 225	230	50/60	34	361	285
E01.250.002	250 x 250 x 120	225 x 225	110	50/60	36	361	285



Model	Dimension	Cut-out	Rated Voltage	Frequency	Power	Air Flow	Air Flow with Exhaust Filter
	(mm)	(mm)	(V AC)	(Hz)	(W)	(m³/h)	(m³/h)
E01.250.003	250 x 250 x 120	225 x 225	230	50/60	70	944	755
E01.250.004	250 x 250 x 120	225 x 225	110	50/60	70	944	755

Model	Dimension	Cut-out	Rated Voltage	Frequency	Power	Air Flow	Air Flow with Exhaust Filter
	(mm)	(mm)	(V AC)	(Hz)	(W)	(m³/h)	(m³/h)
E01.325.001	325 x 325 x 130	290.5 x 290.5	230	50/60	135	1917	1533

**Operating Temperature:** -10°C / +65°C  
**Protection Degree (IP):** IP54  
**Plastic Material:** UL94 V0 ABS Flame Retardant  
**Airflow Direction:** Outside - IN

Finishing	Code
RAL 7032	4
RAL 7035	5
RAL 9005	6

## Filter Fan DC



Model	Dimension	Cut-out	Rated Voltage	Power	Air Flow	Air Flow with Exhaust Filter
	(mm)	(mm)	(V DC)	(W)	(m³/h)	(m³/h)
E02.105.001	105 x 105 x 42	92 x 92	24	3	69	52



Model	Dimension	Cut-out	Rated Voltage	Power	Air Flow	Air Flow with Exhaust Filter
	(mm)	(mm)	(V DC)	(W)	(m³/h)	(m³/h)
E02.105.001	150 x 150 x 64	125 x 125	24	5	166	124



Model	Dimension	Cut-out	Rated Voltage	Power	Air Flow	Air Flow with Exhaust Filter
	(mm)	(mm)	(V DC)	(W)	(m³/h)	(m³/h)
E02.250.001	250 x 250 x 120	225 x 225	24	31	365	292
E02.250.002	250 x 250 x 120	225 x 225	24	58	944	755



Model	Dimension	Cut-out	Rated Voltage	Power	Air Flow	Air Flow with Exhaust Filter
	(mm)	(mm)	(V DC)	(W)	(m³/h)	(m³/h)
E02.325.001	325 x 325 x 130	290.5 x 290.5	24	115	1250	900

**Operating Temperature:** -10°C / +65°C  
**Protection Degree (IP) :** IP54  
**Plastic Material :** UL94 V0 ABS Flame Retardant  
**Airflow Direction :** Outside - IN

Finishing	Code
RAL 7032	4
RAL 7035	5
RAL 9005	6


**Filters**

Model	Dimension	Cut-out
	(mm)	(mm)
E03.105.001	105 x 105 x 15	92 x 92


**Filters**

Model	Dimension	Cut-out
	(mm)	(mm)
E03.150.001	150 x 150 x 20	125 x 125


**Filters**

Model	Dimension	Cut-out
	(mm)	(mm)
E03.250.001	250 x 250 x 33	225 x 225


**Filters**

Model	Dimension	Cut-out
	(mm)	(mm)
E03.325.001	325 x 325 x 37	290.5 x 290.5

Finishing	Code
RAL 7032	4
RAL 7035	5
RAL 9005	6

Protection Degree (IP) : IP54  
Plastic Material : UL94 V0 ABS Flame Retardant





### Roof Fan (Screw Connection)

Model	Dimension	Feed	Power	Air Flow
	(mm)	(V-Hz)	(W)	(m³/h)
E04.175.001	364 x 364 x 126	230 VAC - 50/60Hz	69	470
E04.190.001	364 x 364 x 126	230 VAC - 50/60Hz	34	600
E04.220.001	364 x 364 x 126	230 VAC - 50/60Hz	55	1000

### Roof Fan (Quick Connection)

Model	Dimension	Feed	Power	Air Flow
	(mm)	(V-Hz)	(W)	(m³/h)
E04.175.002	364 x 364 x 126	230 VAC - 50/60Hz	69	470
E04.190.002	364 x 364 x 126	230 VAC - 50/60Hz	34	600
E04.220.002	364 x 364 x 126	230 VAC - 50/60Hz	55	1000

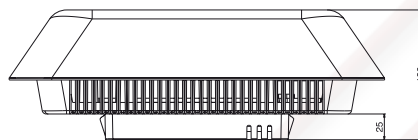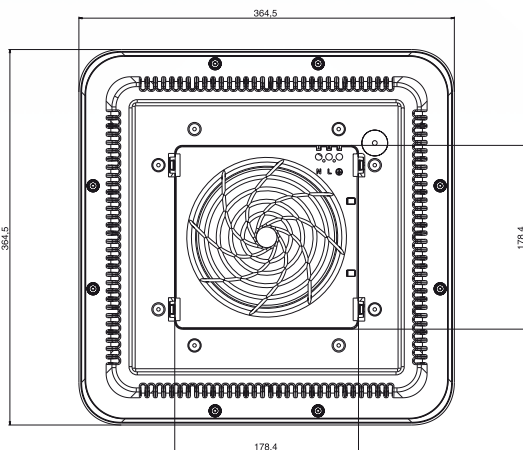

**Operating Temperature:** -10°C / +65°C  
**Protection Degree (IP) :** IP54  
**Plastic Material :** ABS  
**Airflow Direction :** Inside - OUT

Finishing	Code
RAL 7032	4
RAL 7035	5





### NO Thermostat

Model	Description	Rated Voltage	Rated Current	Contact Type	Setting Range	Disc Colour
		(V AC)	(A)		(°C)	
E05.01B.001	Cooling Thermostat	230	10	1 NO	0 - 60	Blue



### NC Thermostat

Model	Description	Rated Voltage	Rated Current	Contact Type	Setting Range	Disc Colour
		(V AC)	(A)		(°C)	
E05.02R.001	Heating Thermostat	230	10	1 NC	0 - 60	Red



### Dual Thermostat

Model	Description	Rated Voltage	Rated Current	Contact Type	Setting Range	Disc Colour
		(V AC)	(A)		(°C)	
E05.03C.001	Cooling+Heating Thermostat	230	10	1 NO+ 1 NC	0 - 60 / 0 - 60	Red + Blue



### Hygrostat

Model	Description	Rated Voltage	Rated Current	Setting Range	Disc Colour
		(V AC)	(A)	(% RH)	
E05.04H.001	Hygrostat	120 - 240	10 - 5	10 - 90	Black

**Operating Temperature:** -20°C / +50°C  
**Plastic Material :** ABS  
**Mounting :** DIN RAIL 35mm  
**Colour :** RAL 7035



## Heaters - MPH Series with Cable

Model	Dimension (H x W x D) (mm)	Rated Voltage (V AC)	Heating Power (W)
E06.015.001	80 x 80 x 50	110 - 250	15
E06.025.001	90 x 80 x 50	110 - 250	25



## Heaters - MPH Series with Terminal Block

Model	Dimension (H x W x D) (mm)	Rated Voltage (V AC)	Heating Power (W)
E06.030.001	100 x 80 x 50	110 - 250	30
E06.045.001	110 x 80 x 50	110 - 250	45
E06.060.001	120 x 80 x 50	110 - 250	60
E06.075.001	160 x 80 x 50	110 - 250	75
E06.100.001	170 x 80 x 50	110 - 250	100
E06.150.001	220 x 80 x 50	110 - 250	150

**Protection Class:** IEC I

**Protection Degree EN 60529 :** IP20

**Operating Temperature:** -45°C / +70°C

**Mounting :** DIN RAIL 35mm

*Operating with Voltage below 140V AC Reduces Heating Performance by Approx. 10%*